



AMERICAN RANGE

A **HATCO** COMPANY

Project: _____

Item #: _____

Quantity: _____

COUNTERTOP HOT PLATE

GAS TYPE: ☐ NATURAL ☐ LP



- | | |
|-------------------------------------|--------------------------------------|
| ☐ ARSHP-12-2 | ☐ ARSHP-36-6 |
| ☐ ARSHP-24-2 | ☐ ARSHP-48-4 |
| ☐ ARSHP-24-4 | ☐ ARSRB-48-8 |
| ☐ ARSHP-36-3 | ☐ ARSRB-60-10 |

STANDARD FEATURES

- Two piece lift off 32,000 BTU/hr. burners
- Heavy duty removable, 12" x 12" cast-iron grates
- Manual gas control valve for each burner
- Stainless steel pilots for instant ignition on each burner
- Full-width removable stainless steel crumb tray for easy cleaning
- 4" adjustable inset legs
- Die-cast, red control knob
- Available from 12", 24", 36", 48", and 60"
- 4" back riser
- Two year limited warranty, parts, and labor

AVAILABLE OPTIONS

- Stainless steel stand with legs or casters



Model Shown: ARSHP-36-6

DESCRIPTION

Gas Hot Plate American Range No. _____.

ARSHP series comes in a variety of burner configurations single depth or double depth. Low profile gas hot plate. Stainless steel front, sides and front top ledge. Unit height 12 9/16" with 4" back riser and 4" adjustable legs. Each burner is a individually controlled 32,000 BTU/burners, two piece lift off burners head for ease of cleaning and a 12" x 12" cast iron grate. Standing pilot ignition system. 3/4" rear gas connection natural gas or LP. Two year limited warranty for parts and labor.




13592 Desmond St Pacoima CA 91331 | T. 818.897.0808 | www.AmericanRange.com



A70258 REV D 7.2026

COUNTERTOP HOT PLATE

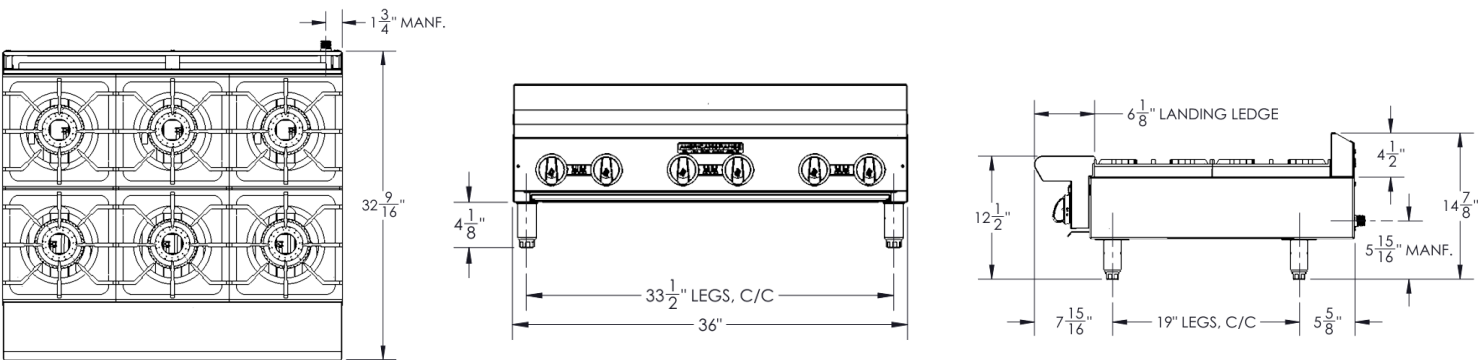

UNIT WEIGHT

MODEL	WIDTH	DEPTH	HEIGHT	BURNERS	BTU	LBS.
ARSHP-12-2	12"	30"	12 9/16"	2	64,000	95
ARSHP-24-2	24"	18"	12 9/16"	2	64,000	95
ARSHP-24-4	24"	30"	12 9/16"	4	128,000	145
ARSHP-36-3	36"	18"	12 9/16"	3	96,000	115
ARSHP-36-6	36"	30"	12 9/16"	6	192,000	210
ARSHP-48-4	48"	18"	12 9/16"	4	128,000	140
ARSHP-48-8	48"	30"	12 9/16"	8	256,000	270
ARSHP-60-10	60"	30"	12 9/16"	10	320,000	325

WHEN ORDERING

- Specify gas type
- Specify elevation if over 2,000 feet.

INSTALLATION

Installation must comply with all local codes

1. A pressure regulator is supplied with the unit and must be installed.
 - 3/4" NPT Gas Inlet
 - Natural Gas: 5.0" W.C.
 - Propane Gas: 10.0" W.C.

2. All models require a minimum 6" (152 mm) clearance at sides and rear to combustible construction, and 0" clearance to non-combustible construction, unless otherwise specified by local codes.

3. A ventilation system is required for commercial cooking equipment in accordance with NFPA 96 (latest edition).
4. These units are manufactured for installation in accordance with the National Fuel Gas Code, ANSI Z223.1/NFPA 54 (latest edition).
5. Note: In the Commonwealth of Massachusetts, all gas appliances vented through a ventilation hood or exhaust system equipped with a damper or power exhaust shall comply with 248 CMR, including interlock requirements.
6. This appliance is manufactured for commercial use only and is not intended for residential installation or use.



Due to continuous product improvements, specifications are subject to change without notice.