



AMERICAN RANGE

A **HATCO** COMPANY

Project: _____

Item #: _____

Quantity: _____

60" GREEN FLAME



ARGF-10



ARGF-24G-6B



ARGF-36G-4B

STANDARD FEATURES

- Stainless steel sides, front and 6" deep front landing ledge.
- Adjustable 6" steel legs (casters optional).
- Choice of: 6" high stainless-steel stub back, high riser or high riser with shelf.
- Base options: Standard, convection, or storage base.
- Two year limited warranty, parts and labor.

OPEN BURNERS

- 12" x 12" cast-iron top grates.
- 22,000 BTU/hrs. burners with electronic ignition, no standing pilot.
- Removable full-width drip pan under burner.

STANDARD 26 1/2" OVEN

- Steel oven burner rated at 35,000 BTU/hr.
- Oven dimensions: 26 1/2"W x 22 1/2"D x 13 1/2"H.
- Thermostat ranging from 250°F to 500°F (121°C to 260°C).
- Oven door: Spring assisted, counterweight door.
- Two chrome plated oven racks (additional racks optional)
- Porcelain enamel oven interior for easy cleaning.
- 100% safety gas shut off.

CONVECTION OVEN *(in place of standard oven)*

- Steel oven burner rated at 30,000 BTU/hr.
- Convection oven fan improves heat transfer for a faster cooking time.
- Two chrome plated oven racks (additional racks optional)
- Chrome rack guides with five tray positions.

STANDARD 20" SUPER SAVER ON

- Steel oven burner rated at 27,000 BTU/hr.
- Space saver: Oven dimensions: 20"W x 26 1/2" D x 13 1/2"H.

GRIDDLES

- 1" thick steel griddle plate and 3" wide grease collector
- One burner every 12", rated at 20,000 BTU/hr.
- Stainless steel pilot for each burner for automatic ignition.

AVAILABLE OPTIONS

- Swivel Casters (set of four - two with front brakes)

GAS TYPE: ☐ NATURAL ☐ LP



Model Shown: ARGF-10 (shown with optional casters)

DESCRIPTION

American Range, green flame range size 60" x 32-1/2" x 56" stainless steel front, sides, backriser, shelf and 6" adjustable legs. Removable full width drip pan. No standing pilots. Choice of 22,000 BTU/hr. open burners with lift-off burner heads or 20,000 BTU/hr. 12" section griddle or a combo burner griddle. Heavy-duty cast iron grates, 12" x 12". Burner knobs are cool to the touch, high temperature material. One oven: 35,000 BTU/hr. standard oven, 30,000 BTU/hr. for convection with porcelain interior and inside door panel, oven interior measures 26 1/2" W x 22 1/2" D x 13 1/2" H. Oven thermostat adjusts from 250°F to 500°F. All ovens supplied with two racks. Oven door with a spring assisted, counterweight mechanism requiring no adjustment. Rear gas connection and pressure regulator. Two year limited warranty, parts, and labor.




13592 Desmond St Pacoima CA 91331 | T. 818.897.0808 | www.AmericanRange.com



A70423 Rev A 8.2026

60" GREEN FLAME

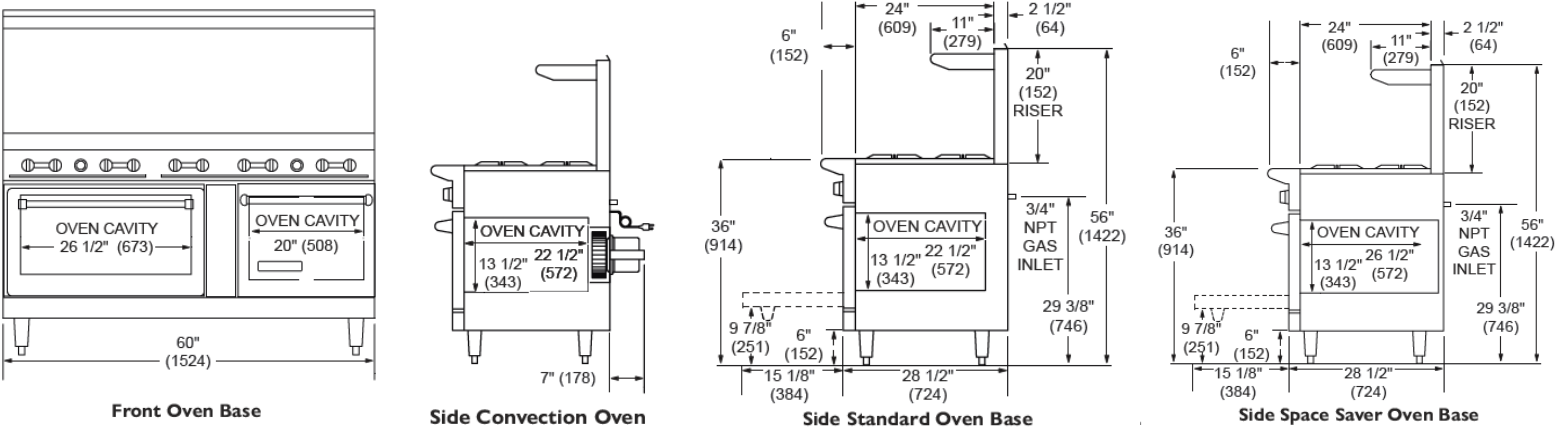

SHIPPING WEIGHT

TOP	MODEL	BTU	(KW)	BURNERS	GRIDDLE SIZE	LBS	(KG)
	ARGF-10	255,000	(74)	10	N/A	732	(332)
	ARGF-10-CL-126R	250,000	(73)	10	N/A	816	(370)
	ARGF-24G-6B	207,000	(60)	6	24" (610 MM)	757	(343)
	ARGF-24G-6B-CL-126R	202,000	(59)	6	24" (610 MM)	841	(381)
	ARGF-36G-4B	139,000	(40)	4	36" (914 MM)	765	(347)
	ARGF-36G-4B-CL-126R	134,000	(39)	4	36" (914 MM)	849	(385)

- 15 amps three prong cord provided

WHEN ORDERING

- Specify gas type
- Specify elevation if over 2,000 feet

INSTALLATION

Installation must comply with all local codes

- A pressure regulator is supplied with the unit and must be installed.
 - 3/4" NPT Gas Inlet
 - Natural Gas: 5.0" W.C.
 - Propane Gas: 10.0" W.C.
- All models require a minimum 6" (152 mm) clearance at sides and rear to combustible construction, and 0" clearance to non-combustible construction, unless otherwise specified by local codes.
- A ventilation system is required for commercial cooking equipment in accordance with NFPA 96 (latest edition).
- These units are manufactured for installation in accordance with the National Fuel Gas Code, ANSI Z223.1/NFPA 54 (latest edition).
- Note: In the Commonwealth of Massachusetts, all gas appliances vented through a ventilation hood or exhaust system equipped with a damper or power exhaust shall comply with 248 CMR, including interlock requirements.
- This appliance is manufactured for commercial use only and is not intended for residential installation or use.



Due to continuous product improvements, specifications are subject to change without notice.