



AMERICAN RANGE

A **HATCO** COMPANY

Project: _____

Item #: _____

Quantity: _____

JET BURN WOK RANGES

GAS TYPE: ☐ NATURAL ☐ LP



☐ ARW-13

☐ ARW-16

STANDARD FEATURES

- Durable stainless steel front, sides, and legs
- Heavy gauge steel ring to support 13" or 16" wok
- Unit designed to slope to reduce spill overs
- Powerful 23 tip jet burner 160,000 BTU/hr.
- Continuous pilot for instant ignition
- Handle provides easy control of the flame and heat
- 3/4" rear gas connection
- Two year limited warranty, parts, and labor

OPTIONAL FEATURES

- Casters



Model Shown: ARW-13 (Wok bowl not included)

DESCRIPTION

Durable stainless steel sides, front, and legs provide a robust, easy-to-clean wok range. Heavy-gauge steel top featuring either a 13" or 16" wok opening. Equipped with a high-performance jet burner, 160,000 BTU/hr. continuous pilot ignition, and control handle for easy control of the flame and heat.

Unit is supplied with 1" adjustable bullet feet; optional casters are available. Gas connection is located at the rear with a 3/4" NPT inlet. Two-year limited warranty covering parts and labor.




13592 Desmond St Pacoima CA 91331 | T. 818.897.0808 | www.AmericanRange.com



A70258 REV D

JET BURN WOK RANGES

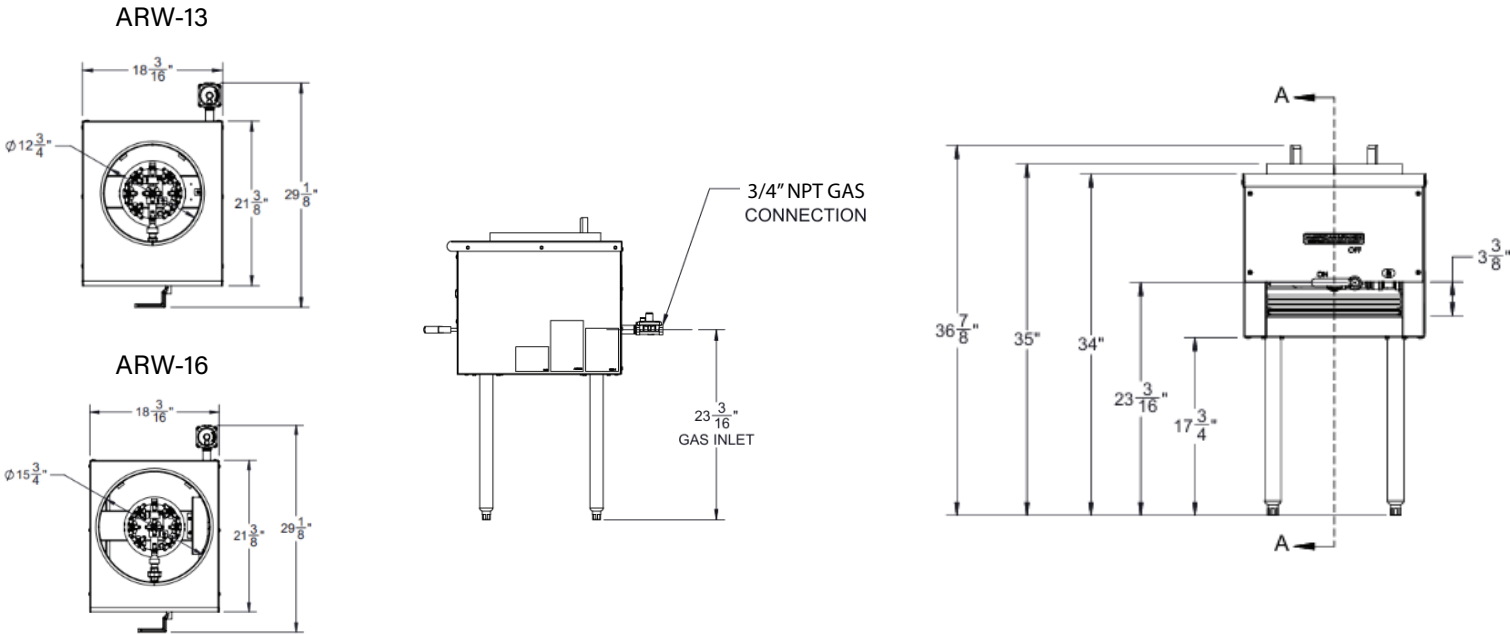

UNIT WEIGHT								
MODEL	WIDTH	DEPTH	HEIGHT	BURNERS	BTU	KW	LBS.	Kg.
ARW-13	18 3/16"	21 3/8"	34"	23 tip jet	160,000	37	120	50
ARW-16	18 3/16"	21 3/8"	34"	23 tip jet	160,000	37	120	50

WHEN ORDERING

- Specify gas type

INSTALLATION

Installation must comply with all local codes

- A pressure regulator is supplied with the unit and must be installed.
 - 3/4" NPT Gas Inlet
 - Natural Gas: 5.0" W.C.
 - Propane Gas: 10.0" W.C.
- All models require a minimum 6" (152 mm) clearance at sides and rear to combustible construction, and 0" clearance to non-combustible construction, unless otherwise specified by local codes.
- A ventilation system is required for commercial cooking equipment in accordance with NFPA 96 (latest edition).
- These units are manufactured for installation in accordance with the National Fuel Gas Code, ANSI Z223.1/NFPA 54 (latest edition).
- Note: In the Commonwealth of Massachusetts, all gas appliances vented through a ventilation hood or exhaust system equipped with a damper or power exhaust shall comply with 248 CMR, including interlock requirements.
- This appliance is manufactured for commercial use only and is not intended for residential installation or use.

