AMERICAN RANGE

A HATCO COMPANY

Project: _____

Item #: _____

Quantity: _____

SALAMANDER BROILER

GAS TYPE: ☐ NATURAL ☐ LP

MADE IN USA

With Domestic and Global Parts

☐ ARSM-24 ☐ ARSB-36

☐ ARSM-36



Model Shown ARSM-36

STANDARD FEATURES

- ARSM-36 single burner unit, 36,000 BTU/ hr.
- ARSB-36 dual burner unit, 36,000 BTU/ hr.
- ARSM-24 single burner unit, 20,000 BTU/ hr.
- Stainless steel front and sides
- Stainless steel standing pilot ignition
- Adjustable infrared burner provides instant, even heating
- Fits a 4" deep hotel pan
- Four level spring balanced adjustable rack
- Grate rolls out for ease of loading and unloading
- Removable stainless steel grease tray
- Removable grate for easy cleaning
- Two year limited warranty, parts, and labor
- Mounting of salamander requires purchase of the correct range mount or wall mount kit

AVAILABLE OPTIONS

- Steel wall mount kit
- Steel range mount kit


DESCRIPTION

American Range Salamander Broilers shall be available in 24" and 36" widths and feature adjustable infrared burners with a stainless steel standing pilot and pilot ignition system. Units shall have stainless steel front and sides, a removable grease pan, and a removable broiler rack for ease of cleaning. A 3/4" gas connection and pressure regulator shall be provided. Units shall carry a two-year limited warranty covering parts and labor.


ETL SANITATION LISTED Intertek

C ETL US LISTED Intertek


SALAMANDER BROILER

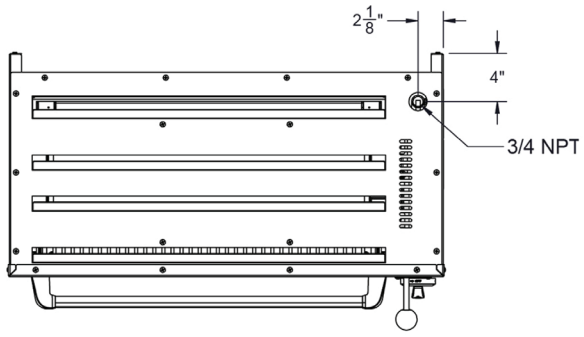


TOP

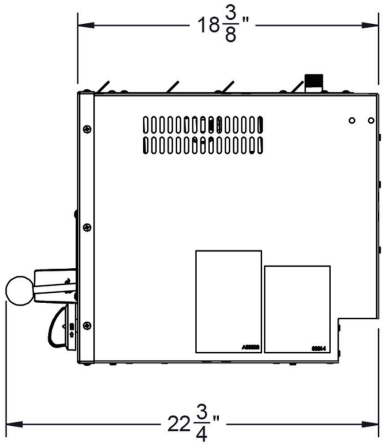

SIDE

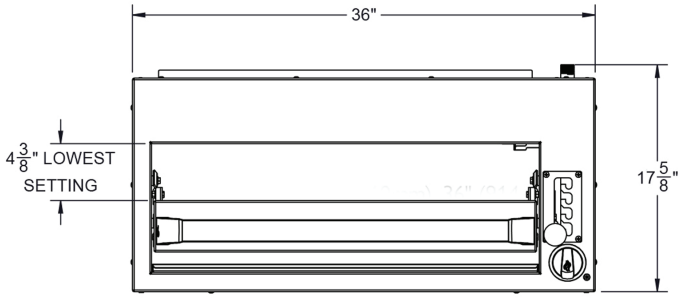

FRONT

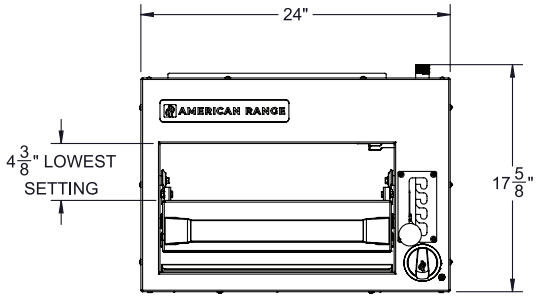

FRONT

Shipping Weight*

Model	Width (mm)	Depth (mm)	Height (mm)	Burners	BTU/hr.	(k.W)	Lbs	(kg)
ARSM-36	36″ (914)	18″ (458)	21 1/2″ (547)	1	36,000	(9)	200	(91)
ARSB-36	36″ (914)	18″ (458)	21 1/2″ (547)	2	36,000	(9)	200	(91)
ARSM-24	24″ (610)	18″ (458)	21 1/2″ (547)	1	20,000	(5.9)	117	(53)

WHEN ORDERING

- Specify gas type
- Specify elevation if over 2,000 feet

CRATED DIMENSIONS (MM)

38"W× 20"D x 21"H965 x 508 x 533)

INSTALLATION

Installation must comply with all local codes

1. A pressure regulator is supplied with the unit and must be installed.

- 3/4″ NPT Gas Inlet
- Natural Gas: 5.0" W.C.
- Propane Gas: 10.0" W.C.

2. Clearances

	Combustible	Non-Combustible
Rear	2″	0″
Sides	0″	0″
Bottom	10″	4″

Note: Mounting of salamander requires purchase of correct range mount or wall mount kit.

3. A ventilation system is required for commercial cooking equipment in accordance with NFPA 96 (latest edition).

4. These units are manufactured for installation in accordance with the National Fuel Gas Code, ANSI Z223.1/NFPA 54 (latest edition).

5. Note: In the Commonwealth of Massachusetts, all gas appliances vented through a ventilation hood or exhaust system equipped with a damper or power exhaust shall comply with 248 CMR, including interlock requirements.

6. This appliance is manufactured for commercial use only and is not intended for residential installation or use.

Due to continuous product improvements, specifications are subject to change without notice.