



AMERICAN RANGE

A **HATCO** COMPANY

Project: _____

Item #: _____

Quantity: _____

COUNTERTOP INDUCTION



- | | |
|--|--|
| ☐ ARIND-4H-24-1 | ☐ ARIND-6H-24-1 |
| ☐ ARIND-4H-24-3 | ☐ ARIND-6H-24-3 |
| ☐ ARIND-4H-29-3 | ☐ ARIND-6H-29-3 |

STANDARD FEATURES

- Countertop 4 or 6 Induction hob range fits on a stand or refrigerated base
- Built with Hatco's induction technology proven over 10 years of field use
- Culinary equivalent of up to 31,000 BTU/hr. gas hob
- Independent hob performance provides flexible control and consistent output across every cooking zone
- Two surface temperature sensors per hob offer the most accurate control in its class
- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), or temperature (°F or °C in one degree increments)
- Includes two grease filters and conformal-coated boards
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Durable Schott Ceran, glass 6mm thick top
- IPX3 rated, fully-sealed top stops grease or moisture from penetrating the unit, even if the top gets broken
- Automatic shut-off to prevent overheating
- USB service access
- Withstands high ambient kitchen temperatures (up to 124°F/51°C)
- 71" (1800 mm) cord with plug

Optional Stands

- 24" Equipment Stand
- 36" Equipment Stand



Model Shown: ARIND-4H, ARIND-6H

DESCRIPTION

The multi-hob countertop induction range shall be an American Range ARIND-4H or ARIND-6H series model. The unit shall have four or six independently controlled induction cooking zones beneath a single ceramic-glass cooking surface. Each hob shall include a dedicated display, rotary control, power mode, temperature mode, pan detection, and over-temperature protection. The unit shall include a stainless-steel commercial housing, forced-air cooling, removable air filters, USB service access, and a factory-installed power cord and plug appropriate to the selected electrical configuration. Two year warranty.




13592 Desmond St Pacoima CA 91331 | T. 818.897.0808 | www.AmericanRange.com



A70278 Rev A

COUNTERTOP INDUCTION

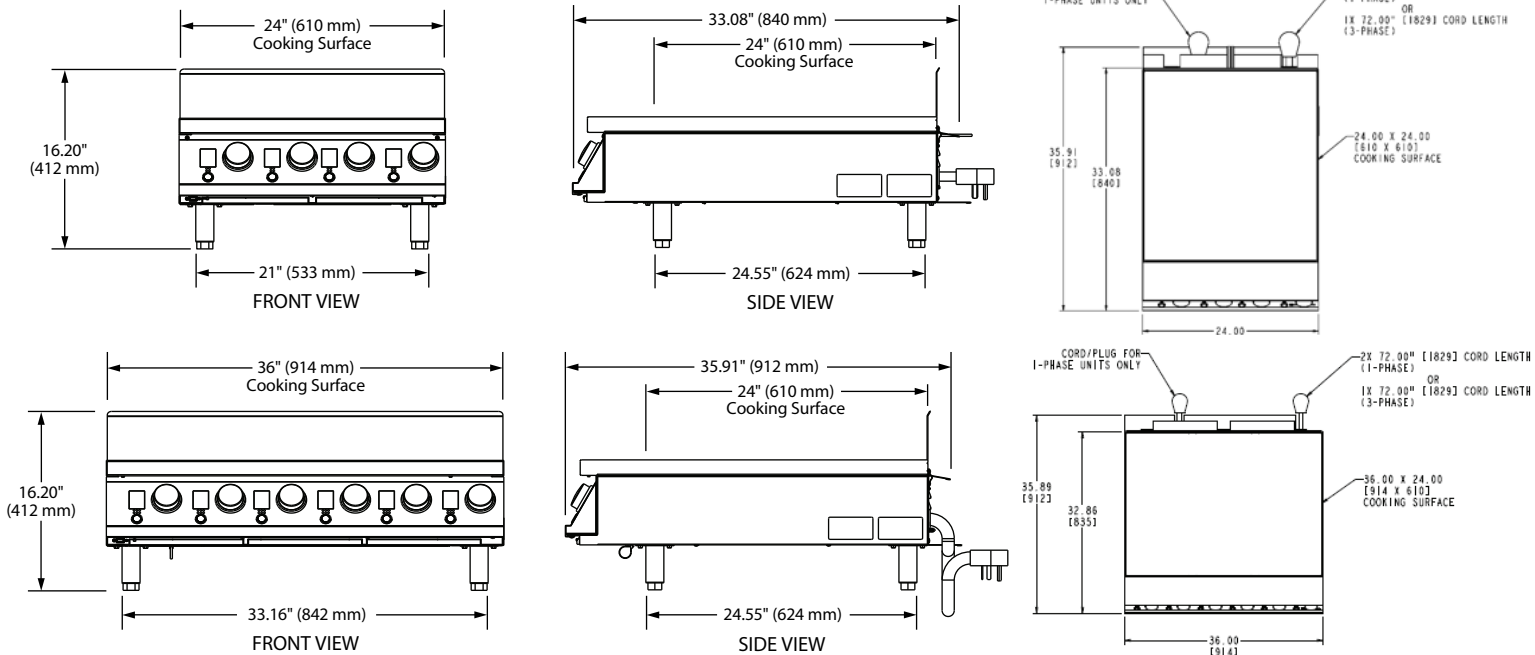


MODEL	DIMENSIONS	VOLTS	PHASE	WATTS	AMPS	HZ	PLUG	CORD LOCATION	SHIP WEIGHT*
ARIND-4H-24-3	24" x 33.08" x 16.20" (610 x 840 x 412mm)	208-240	3 phases	9600	31.5-27.3	50/60	NEMA 15-50P	Rear left bottom base corner	144 lbs. (65 kg)
ARIND-4H-29-3		208-240		11514	37.8-32.8	50/60	NEMA 15-60P		
ARIND-6H-24-3	36" x 35.91" x 16.20" (914 x 912 x 412mm)	208-240		14400	40	50/60	NEMA 15-50P		203 lbs. (92 kg)
ARIND-6H-29-3		208-240		17272	48	50/60	NEMA 15-60P		
ARIND-4H-24-1	24" x 33.08" x 16.20" (610 x 840 x 412mm)	208-240	1 phase**	4800	23.1-20	50/60	2x NEMA 6-50P		144 lbs.(65kg)
ARIND-4H-29-1		208-240		5757	27.7-24	50/60			144 lbs.(65kg)
ARIND-6H-24-1	36" x 35.91" x 16.20" (914 x 912 x 412mm)	208-240		7200	34.5-30	50/60			203 lbs.(92kg)

* Shipping weight includes packaging and is approximate.

** Not available in CANADA

PLUG CONFIGURATIONS

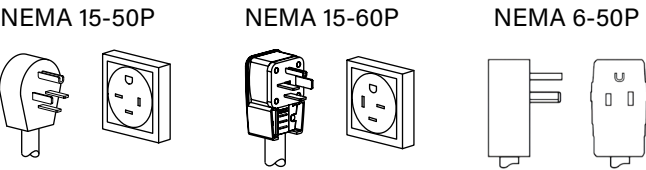

Optional Stands

MODEL	DESCRIPTION
OV-STND-2424-C	ARS Stand 24" H 24" W Casters
OV-STND-2424-L	ARS Stand 24" H 24" W Legs
OV-STND-2436-C	ARS Stand 24" H 36" W Casters
OV-STND-2436-L	ARS Stand 24" H 36" W Legs

