



AMERICAN RANGE

A **HATCO** COMPANY

Project: _____

Item #: _____

Quantity: _____

VERTICAL BROILER

GAS TYPE: ☐ NATURAL ☐ LP



☐ AVB-2

STANDARD FEATURES

- All stainless steel front, sides, and top
- Compact design for counter installation
- Sturdy skewers hold up to 65 lbs of product
- 15" diameter pan at the bottom, slides front and back
- Two burners rated at 20,000 BTU/hr. each
- Manual valve control for each burner
- Heavy duty powerful gear motor for smooth and even rotation
- Front panel on/off switch
- Skewer height 22"
- Six position adjustment of skewer
- Two year limited warranty, parts, and labor

OPTIONAL FEATURES

- Equipment Stand



Model Shown: AVB-2

DESCRIPTION

American Range Vertical Broiler, gas, (2) 20,000 BTU/hr. burners. Manual valve control for each burner. 6-position adjustable skewer, 15" diameter grease pan, 22" skewers hold up to 65 lb. of product, stainless steel exterior. Two year limited warranty, parts, and labor.




13592 Desmond St Pacoima CA 91331 | T. 818.897.0808 | www.AmericanRange.com



A70177 REV F 8.17.2026

VERTICAL BROILER

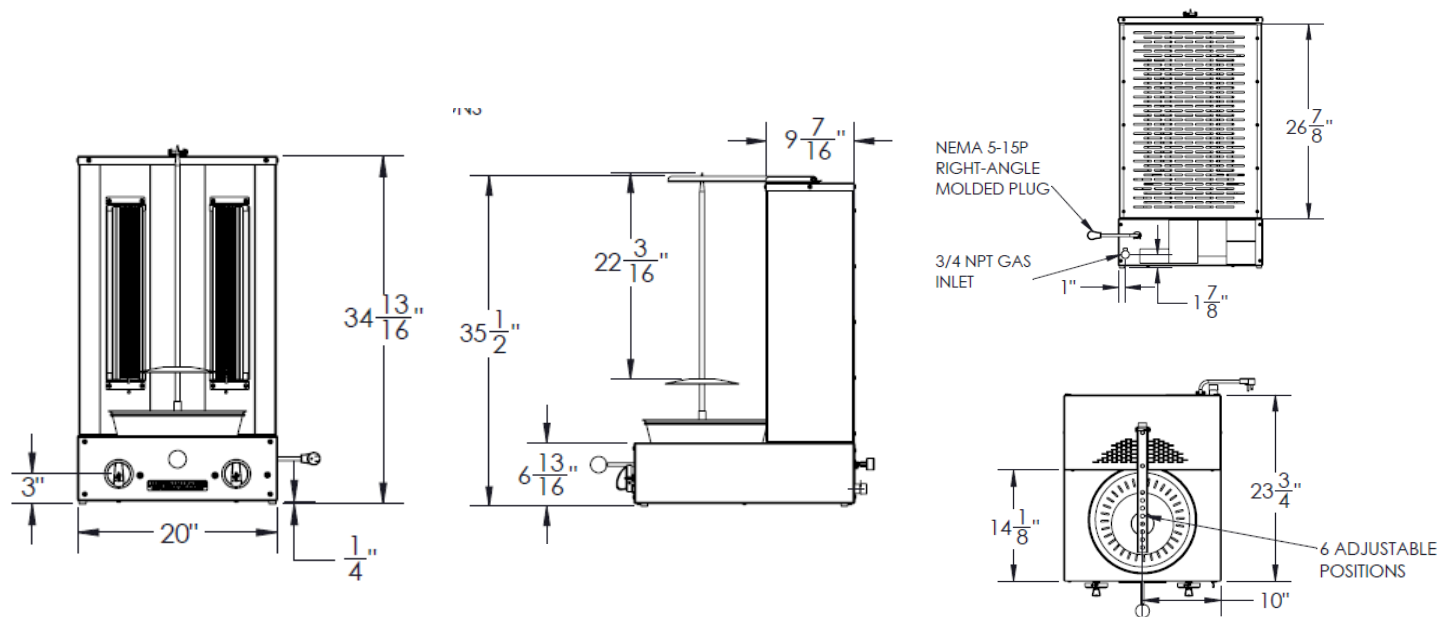

SHIPPING WEIGHT

MODEL	DESCRIPTION	WIDTH (MM)	DEPTH(MM)	HEIGHT(MM)	BURNERS	BTU/hr.	(KW)	LBS	(KG)
AVB-2	20" AVB Vertical Broilers	20"(508)	23-3/4" (603)	34" (864)	2	40,000	(12)	125	(57)

120 VAC, Single Phase, 60Hz, .6 amp. NEMA 15-5 power cord provided

WHEN ORDERING

- Specify gas type if altitude is over 2,000 feet
- Gas regulator included

INSTALLATION

Installation must comply with all local codes

- A pressure regulator is supplied with the unit and must be installed.
 - 3/4" NPT Gas Inlet
 - Natural Gas: 5.0" W.C.
 - Propane Gas: 10.0" W.C.
- All models require a minimum 6" (152 mm) clearance at sides and rear to combustible construction, and 0" clearance to non-combustible construction, unless otherwise specified by local codes.

- A ventilation system is required for commercial cooking equipment in accordance with NFPA 96 (latest edition).
- These units are manufactured for installation in accordance with the National Fuel Gas Code, ANSI Z223.1/NFPA 54 (latest edition).
- Note: In the Commonwealth of Massachusetts, all gas appliances vented through a ventilation hood or exhaust system equipped with a damper or power exhaust shall comply with 248 CMR, including interlock requirements.
- This appliance is manufactured for commercial use only and is not intended for residential installation or use.



Due to continuous product improvements, specifications are subject to change without notice.